


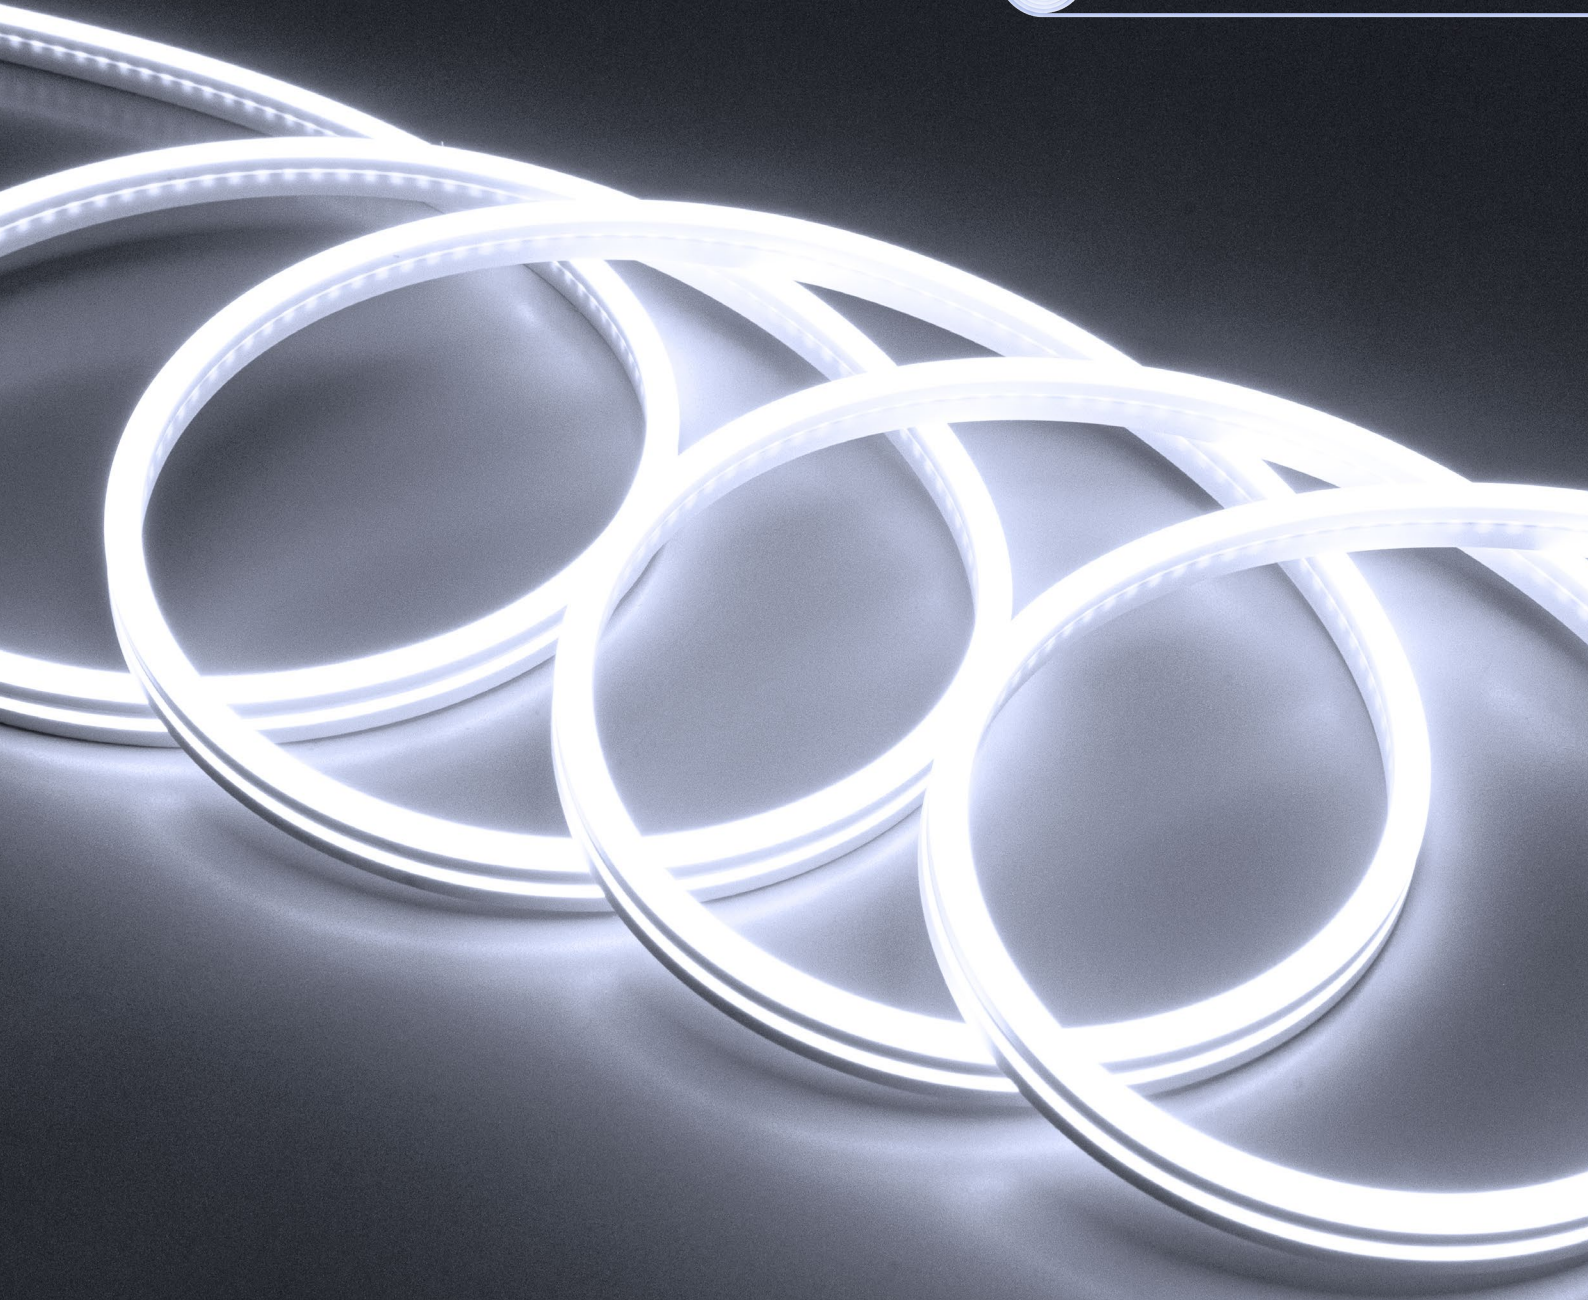

Product Specification Sheet

At Döllken Lighting, we take pride in being a manufacturer of high-quality LED lighting solutions designed for advanced applications and projects. The products in our „Optimum“ line offer alternatives that combine efficiency and exceptional performance, making them ideal for a wide range of uses. These solutions uphold the high standards of Döllken Lighting, serving as an excellent choice for those seeking quality and versatility in a single product.

Let's design our future together.

Döllken
Lighting

Doellken Harmony DTW

ULTRA WARM - WARM

dimensions

measures	10x1,1 mm
step length	62.5 mm
pitch	visible

light

Colour CCT	1800~3000K
luminous flux	1460 lm/m
CRI	> 90
life time	50.000 h, LM70
binning	3 SDCM

electrical

voltage	24V DC
power	18 W/m
LEDs per meter	224
ESD protection	ESD2000V
inverse polarity connection	Max 30V
Tc°	Max 65°C
dimmable	yes

mechanical

dimensions of step	62.5x10x1.1 mm
suitable mounting method	3M back tape
degree of protection	IP20
mechanical impact protection	IK00
bending radius vertical	25 mm
bending radius horizontal	no
aluminium profil dimensions	no
aluminium profil colour	no

encapsulation

combustibility class	UL-94-HB
dielectric strength	500V
halogen free	Yes
chlorine free	Yes


environmental /compliances

ambient temperature	-20°C ~ +40°C
compliances	CE, RoHS
warranty	3 years warranty

preview



technical drawings

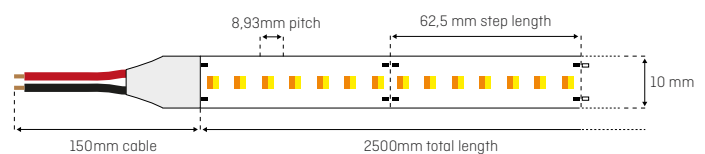

EAN/Reel 4036793155470

Movex 5128278

Döllken Profiles GmbH

Döllken Lighting

Industriestraße 1

59199 Bönen | Germany

Tel.: +49 (0) 36 43 / 41 70-540

E-Mail: info@doellken-lighting.com

www.doellken-lighting.com