


DLx4 10/800

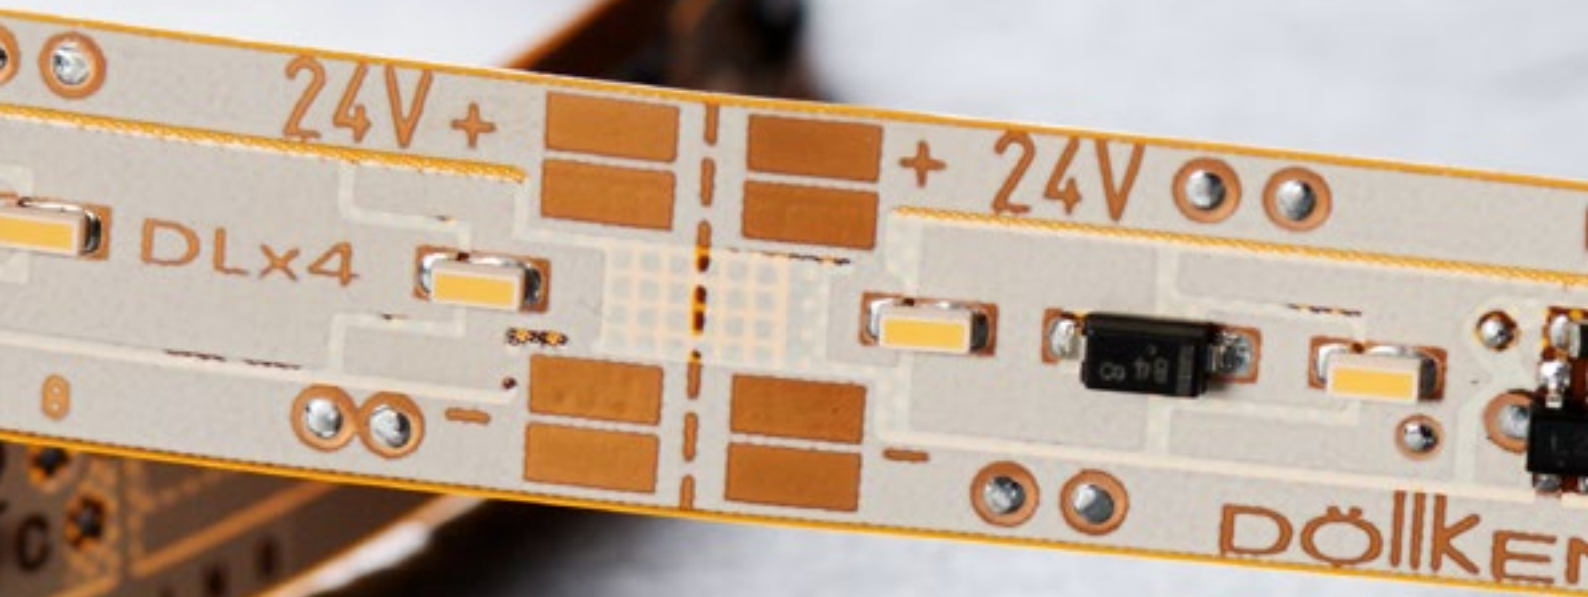

Product specification sheet

Our unprotected conductor film is primarily designed for indoor use, and its lack of sheathing enables it to demonstrate its full energy efficiency. The flexible LED strip can be installed with or without a self-adhesive strip and can be easily retrofitted to existing profiles.

Let's design our future.

Döllken
Lighting

.....
we create.
we innovate.

SURTECO GROUP

dimensions

measures	10 x 2 mm
step length	50 mm
pitch	10 mm
max. connection length	10 m

light

CCT of PCB*	2.7/3/4/5.000 K
luminous flux**	1.300 lm/m
binning	MacAdam Step 4
CRI of PCB [Ra]	> 90, (5.000K > 80)
expected life time	50.000 h, LM70

electrical

voltage	24 V
power	19,2 W/m
LEDs per step	5
current per step	40 mA
constant current driver each step	yes
ESD protection	yes
inverse polarity connection	yes
Tc°	55°C
dimable	yes, only PWM
needed driver must comply	24 V DC SELV

mechanical

dimensions of smallest operating unit	50 x 10 x 2 mm
suitable mounting method***	glue
degree of protection (strip)	IP00
degree of protection (connection)	IP00
mechanical impact protection	IK00
bending radius vertical	20 mm
bending radius horizontal	200 mm
aluminium profil dimensions	-
aluminium profil colour	-


encapsulation

combustibility class	-
dielectric strength	-
halogen free	-
chlorine free	yes

environmental /compliances

ambient temperature	-20 °C to + 60 °C
WEEE-Reg. No.	41380720, Döllken Lighting Flex Line
compliances	CE, RoHS, DIN EN 62031:2008, DIN EN 62717
warranty	5 years (conditions apply)
energy efficiency class	A - A++

step schematic

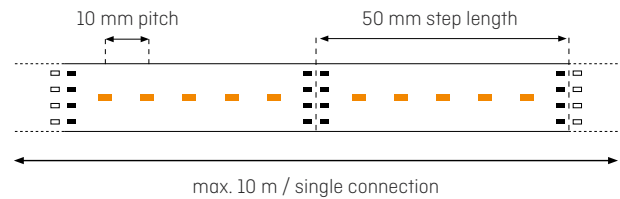

* correlated colour temperature of PCB, encapsulation will affect the colour temperature

** luminous flux is related to 5.000 K, warmer colour temperatures will reduce the luminous flux, all data are showing typical values, actual lumen output can be less and depends also on surface colour

*** the LED modules are being delivered without any adhesive tape or glue, aluminum profiles have to be ordered separately, recommendations regarding suitable glue/tapes are being given for individual projects

Product	short form	CCT	article number
LED Band2K7-24-5-50-M1 CLL620	DLx4 10/800/2K7	2.700 K	5114428
LED Band3K0-24-5-50-M1 CLL620	DLx4 10/800/3K	3.000 K	5114429
LED Band4K0-24-5-50-M1 CLL620	DLx4 10/800/4K	4.000 K	5114430
LED Band5K0-24-5-50-M1 CLL620	DLx4 10/800/5K	5.000 K	5114431

Döllken Profiles GmbH

Döllken Lighting

Gewerbepark U.N.O. | Stangenallee 3

99428 Nohra | Germany

Tel.: +49 (0) 36 43 / 41 70-540

E-Mail: info@doellken-lighting.com

www.doellken-lighting.com